



Reeves LED Flush Mount RVEF Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

Ornamental metal accents with a white linen fabric side diffuser.
White bottom acrylic diffuser. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).



Construction

The canopy is made of 22-gauge cold rolled steel. The LED pan is white painted. Standard mounting holes and hardware included. The canopy fits over a standard junction box. Power supply connections must be made inside a junction box (not included).

Finish

Satin nickel metal accents.

Diffuser

White linen fabric side diffuser.

White acrylic bottom diffuser.

Electrical

Input 120-277 VAC 60 HZ.

Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.

TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:

30W = 2400 source lumens, 1560 delivered lumens

42W = 3200 source lumens, 2100 delivered lumens

Adjustable Choice 3000K, 3500K, 4000K (CCT).

Rated for 50,000 Hrs., 90 CRI.

Options

Emergency Battery Back-Up (add -BB to the end of the model number)

Motion Sensor (add -MS to the end of the model number)

Emergency Battery Back-Up with Motion Sensor (add -MSBB to the end of the model number)

90 Min. Run Time

Certification

All fixtures are cETLus listed for indoor damp locations.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

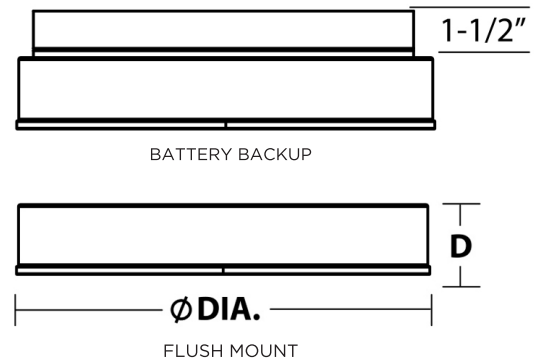

Ordering Information:

Satin Nickel/Linen White	LED	Source Lumens	Delivered Lumens	Adjustable CCT	DIA.	D
RVEF1624LAJUDSNLW	30W	2400	1560	3000K/3500K/4000K	16"	4"
RVEF2032LAJUDSNLW	42W	3200	2100	3000K/3500K/4000K	20-1/4"	4"