



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

SLATE™ PRO SPLE Series

Features

For new construction or renovation, the Slate Pro Color-Control LED System provides lighting flexibility to suit the setting, facilitate a task or set the mood. Evenly lit, glare free illumination.

Powered by a 3-function control designed to provide full range dimming down to 5% or step dimming while also controlling the color temperature from 2700K warm to 4000K cool white light. Versatile in wall or remote surface mounted options for full installation flexibility.

The remote power supply can be hard wired or plugged into any standard 120V outlet and comes in two wattage options; 36W or 72W. (System components each sold separately).

- One-touch full-range dimming
- One-touch color temperature (CCT) adjustment, from warm to cool (2700°K–4000°K)
- Edge-Lit LED panels provide evenly distributed, glare-free light for all surfaces
- Linkable panels includes multiple connectors for a variety of layout options
- Ultra-low 1/2" LED panel profile
- Dual-run capability allows full installation flexibility
- 500 lumens per foot, 90 CRI
- Title 24 compliant
- Powder-coated housing with molded endcaps
- Each panel includes 12" connecting cable and direct connector
- Easy, flexible DC installation
- 120VAC input, 36W - 144W DC (Depending on Power Supply)
- 2 power supply options (36W and 72W)
- Patent Pending

Construction

Durable extruded aluminum body with injection molded end caps. Power connections are made in side junction box (Not Included) or with cord and plug.

Finish

All exposed metal parts are post painted powder coat and available in the following finishes: White (WH) or Oil-Rubbed Bronze (RB)

Diffuser

White Polycarbonate.

Electrical

This unit is wired for 120V 60Hz input, 36W -144W DC depending on power supply chosen. Control switch rated for 144W (MAX).

Lamping

SMT array, Edge-lit technology. 2700K-4000K non-replaceable LEDs, rated 50,000 hrs. 90 CRI.


Certification

Fixture/Control switch/ Power supply are listed cETLus for damp location and carry a cETLus rating for undercabinet/convertible/linkable mounting.
Energy Star® qualified
JA8-2016 compliant (Title 24)
FCC Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

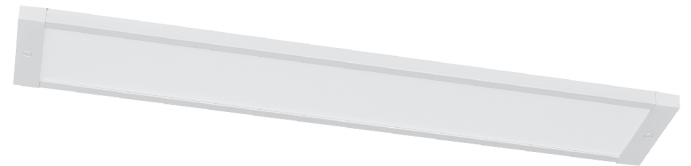




SLATE™ PRO SPLE Series

LED Panels

LED Fixtures		Oil-Rubbed Bronze	Lumens						
Size	White	Bronze	Watts	4000K	LPW	L	W	D	
9 in.	SPLE9WH	SPLE9RB	4.5W	375	58	9"	5"	1/2"	
14 in.	SPLE14WH	SPLE14RB	7.5W	585	60	14"	5"	1/2"	
22 in.	SPLE22WH	SPLE22RB	12W	920	60	22"	5"	1/2"	
32 in.	SPLE32WH	SPLE32RB	18W	1330	60	32"	5"	1/2"	
40 in.	SPLE40WH	SPLE40RB	22W	1670	60	40"	5"	1/2"	


Each panel includes (1) one:

- 12" interconnect cord
- Direct connector

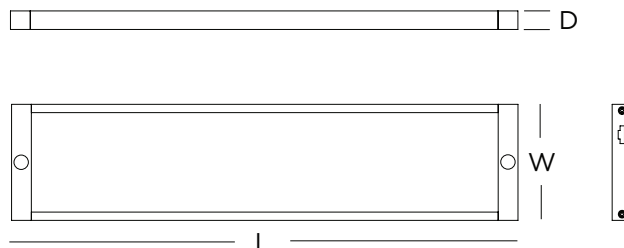

Control Switch (required)

	Watts	L	W	D
LCX-CON	144 Max.	2-7/8"	1-3/4"	1/2"




Each switch includes (1) one:

- J-box mounting bracket
- Alternative under cabinet cover plate
- DC interconnect cable (8' long)

Power Supply (required)

	Watts	L	W	D
LCX-PWR36	36W	7-1/2"	2-1/2"	1-1/8"
LCX-PWR72	72W	7-1/2"	2-1/2"	1-1/8"




Each power supply includes (1) one:

- AC power cord
- DC input cord (10' long)

Accessories

SPLECL24	24" Interconnect cord
SPLECL36	36" Interconnect cord
SPLECL48	48" Interconnect cord
SPLECL72	72" Interconnect cord



SPLEDC	Direct Connector
--------	------------------



System Wiring Diagram

