



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Standard Striplight
ST Series - Chassis Only, Ballast Bypass (No Ballast)
For use with Direct-Wire LED Tubes (Type B)

Features

Functional and multi-purpose standard 1, 2 or 4 light strip channel provides general illumination for indoor and damp applications. Product features include snap assembly of ends, socket bars and wire way cover and requires no tools. Fixture can be mounted individually or in continuous rows for surface or suspended mounting. Applications include light commercial, industrial, retail, coves and displays. Indoor use only.

Construction

Heavy-duty channel is die-formed from 22-gauge steel. Channel cover snaps to housing for easy access to wire way. Electrical connections are made inside the wire way. Standard mounting holes and wiring knockouts are included.

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

No diffuser for this fixture. LED tube lamps are exposed.

Electrical

Wired for use with 120V or 277V VAC 50/60 Hz circuits.

Lamping

Direct-wire LED tube lamps supplied by others (not included) (Type B).


Certification

cETLus for damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for 5 years from date-of-purchase.

Specifications and dimensions
 subject to change without notice.

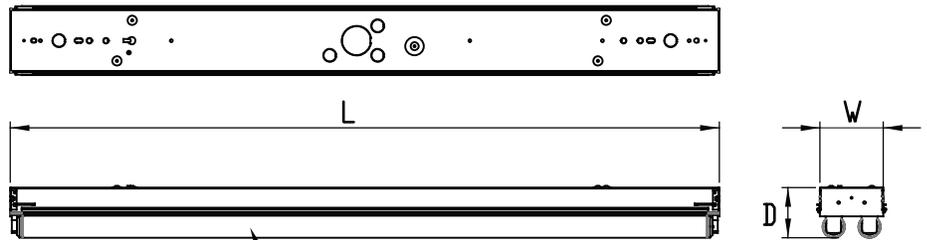

LAMPS BY OTHERS

Ordering Information:

Model No.	Lamp Qty.	Suitable Base Type	L	W	D
ST1L18	1	G13 - Medium Bi-Pin	18"	2-5/8"	3-1/4"
ST1L24	1	G13 - Medium Bi-Pin	24"	3-1/8"	3-1/4"
ST1L36	1	G13 - Medium Bi-Pin	36"	3-1/8"	3-1/4"
ST1L48	1	G13 - Medium Bi-Pin	48"	3-1/8"	3-1/4"
ST2L24	1	G13 - Medium Bi-Pin	24"	4-3/4"	3-1/4"
ST2L36	2	G13 - Medium Bi-Pin	36"	4-3/4"	3-1/4"
ST2L48	2	G13 - Medium Bi-Pin	48"	4-3/4"	3-1/4"
ST4L96	4	G13 - Medium Bi-Pin	96"	4-3/4"	3-1/4"
ST2L96-FA8	2	FA8 - Single Pin (NO Lamp)	96"	4-3/4"	3-1/4"
ST2L96-R17D	2	R17D- Recessed Double Contact (NO Lamp)	96"	4-3/4"	3-1/4"