



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Storm LED Sconce STMS Series

Features

Dynamic cut metal faceplate offers unique lighting array. Indirect light with wall wash effect. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Vertical or horizontal mounting. Meets ADA requirements. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Back plate and bands are finished in Black Chrome or Silver.

Diffuser

Edge-lit acrylic diffuser.

Electrical

Input 120-277 VAC, 60 Hz LED.
LED driver is 0-10V DC dimmable.

LED

Integrated LED modules capable of producing:
13W = 800 source lumens, 656 delivered lumens
3000K (CCT) rated for 50,000 hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.


**Limited Quantities Remain.
Consult Factory.**



Black Chrome



Silver

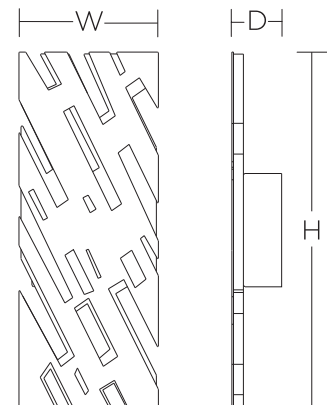

Ordering Information:

Black Chrome	Silver	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
STMS061408L30D2BC	STMS061408L30D2SL	13W	800	656	3000K	14"	5-1/2"	2"