

LED Closet Light T5LC Series

Features

All purpose direct wire LED closet light. Low profile for smaller closets. Standard knockouts are located on top, back or ends for direct connection. A direct wire UL listed connector is included and is suitable for 3/8" flexible conduit or 3-wire Romex.

Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power connections are made inside service tray.

Finish

All exposed metal parts are post painted lighting grade white paint.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical

This unit is wired for 120V operation. On/off switch rocker or pull chain switch (included).

Lamping

LED lamping, type SMT array, 4000K non-replaceable, Rated 50,000 hrs., 90 CRI.


Certification

cETLus listed for damp locations
Title 24/JA8 compliant
FCC compliant
Certified for use in clothes closet storage space as defined in
NEC 410.2, 410.16(A)(3), and 410.16(C)(5)

Warranty


Limited warranty. This fixture guaranteed to be free from defects in materials and workmanship for a period of 5 years from date of purchase.


Specifications and dimensions subject to change without notice.







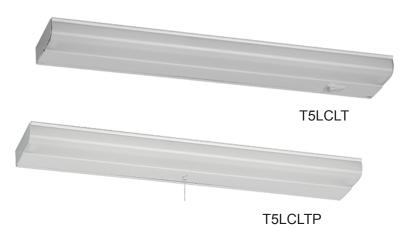



Ordering Information:

White	Туре	Watt	Lumens	LPW	L	W	D
T5LCLT (on/off rocker switch)	SMT-Array	9	700	77	18"	4-1/2"	1-1/8"
T5LCLTP (on/off pull chain switch)	SMT-Array	9	700	77	18"	4-1/2"	1-1/8"