



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Adjustable Wattage LED Vaportite VTL Series

Features

Designed for applications requiring an industrial grade fixture that can be used where dirt, dust, humidity, moisture and cold temperatures are present. The polycarbonate housing is fully gasketed. Includes mounting brackets and water tight connector.



Option

Emergency Battery Back-Up (model # with -BB)
9.5VDC LiFeP04 battery, 8 Watts, 90 minute run time.



Construction

Impact resistant grey polycarbonate housing. Continuous gasket offers secure seal against dust and moisture. Power supply connections can be made inside fixture wire way or in a junction box (not included).

Finish

Grey polycarbonate finish.

Diffuser

White polycarbonate diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:
Adjustable Wattage: 30W / 40W / 50W
Delivered Lumens: 4780 / 5940 / 7580
Adjustable CCT: 3000K/3500K/4000K/5000K/6500K
Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for indoor and outdoor wet locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

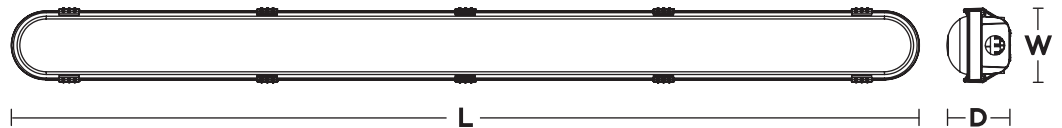

Ordering Information:

Grey	Adjustable Wattage	Delivered Lumens	Adjustable CCT	L	W	D
VTL48AJLAJD2	30W/40W/50W	4780/5940/7580	3000K/3500K/4000K/5000K/6500K	47-1/4"	3-3/4"	3-3/8"
VTL48AJLAJD2-BB	30W/40W/50W	4780/5940/7580	3000K/3500K/4000K/5000K/6500K	47-1/4"	3-3/4"	3-3/8"