



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Industrial Grade Vaportite VTL Series

Features

Designed for applications requiring an industrial grade fixture that can be used where dirt, dust, humidity, moisture and cold temperatures are present. The white polycarbonate housing is fully gasketed and snap fit polycarbonate latches provide a tight fit between the lens and housing.



Construction

Impact resistant white polycarbonate housing. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

White polycarbonate.

Diffuser

Clear polycarbonate diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Not compatible with dimmers.

LED

Integrated LED modules capable of producing:
34W = 3500 source lumens
4000K (CCT). Rated for 50,000 Hrs., 90 CRI.

Certification

cETLus listed for wet locations.


Option (Consult Factory)

Emergency Battery Back-Up (add -BB to the end of the model number)
90 minute run time. 9.5VDC LiFeP04 battery. 8 Watts.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

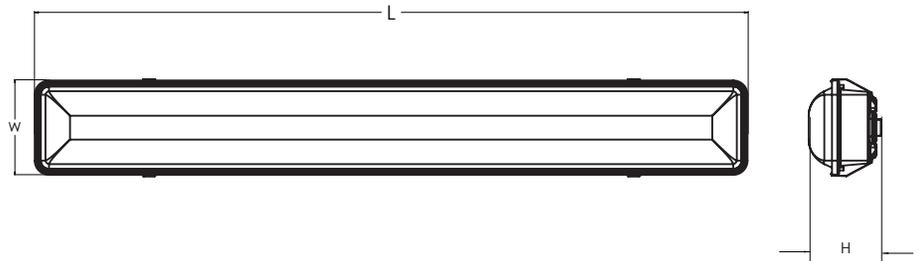

Ordering Information:

Cool White	LED	Source Lumens	CCT	L	W	H
VTL483500L40MV	34W	3500	4000K	48"	6-3/4"	5-1/8"