



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Zurich ZUL/ZUF Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).



Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).



Finish

Satin nickel or White frame finish.

Diffuser

White diffuser is made of engineered LED acrylic material.



Electrical

Input 120VAC / 60 Hz.

The LED driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.


LED

Fixture includes LED modules capable of producing:

26W = 2600 source lumens

39W = 3900 source lumens

3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

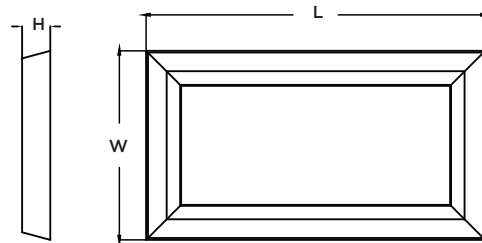

Certification

cETLus listed for damp locations.


Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions

subject to change without notice.

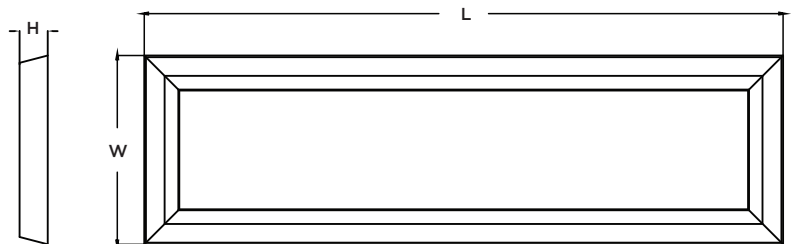

Ordering Information:

Satin Nickel	White	LED	Source Lumens	CCT	L	W	H
ZUL12241800L30D1WH	ZUL12241800L30D1WH	26W	1800	3000K	27"	15"	2-3/8"
ZUL12483200L30D1SN	ZUL12483200L30D1WH	39W	3200	3000K	51"	15"	2-3/8"

Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand	Model #
Lutron®	MACL-153M