

# HELIX PENDANT

---



## CONSTRUCTION:

- Fabric shade
- White acrylic bottom diffuser with finial
- Top and bottom metal decorative trim
- 36 in. standard stem kit includes 6 in., 12 in. and 18 in. sections for adjustability
- Additional stem sections available, maximum height 12 ft.
- 12 ft. of field adjustable wire included



## ELECTRICAL:

- 120V medium base sockets
- Integrated LED option (50,000 Hrs., 90 CRI, CCT 3000K)

## CERTIFICATION:

- cULus Listed (medium base)
- ETL Listed (LED)

# HELIX PENDANT

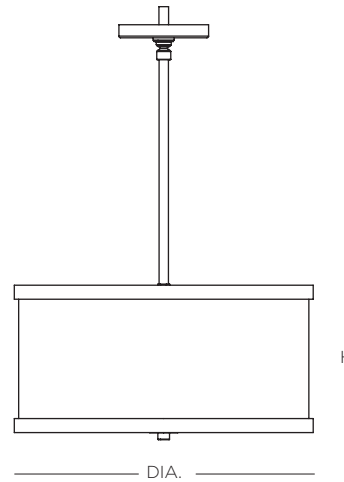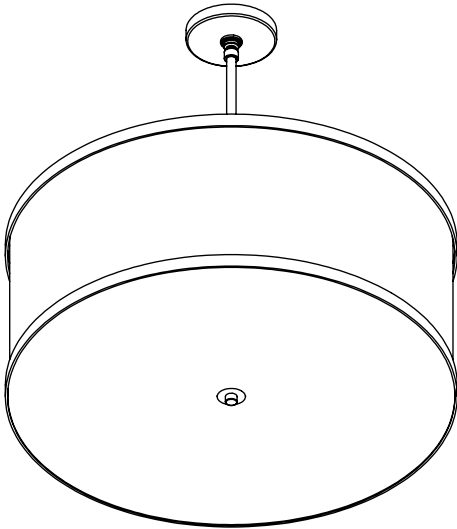

Specifications			Medium Base	Integrated LED	
Size	DIA.	H	Sockets	Source Lumens	Wattage
01	16"	8"	2 x 75W max	2400	30W
02	24"	12"	3 x 75W max	3200	44W
03	32"	16"	3 x 100W max	4400	55W

## Ordering


Model	Size	Lamping	- Finish	- Fabric
SHLXP	01 = 16" 02 = 24" 03 = 32"	MB Medium Base Socket L1 LED (120V TRIAC Dimming) L2 LED (120-277V 0-10V Dimming)	PN Polished Nickel RB Hand-Rubbed Bronze	203 Black Silk Dupioni 206 Ivory Silk Dupioni 209 White Silk Dupioni

Example: SHLXP02L1-PN-206

## Finish Options




PN  
Polished Nickel



RB  
Hand-Rubbed Bronze


## Fabric Options



203  
Black Silk  
Dupioni



206  
Ivory Silk  
Dupioni



209  
White Silk  
Dupioni

All specifications and dimensions subject to change without notice.