



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Brio LED Sconce BRS Series

Features

Half round wall mount sconce is ADA compliant and offers high quality decorative extruded aluminum bands. Open top and bottom for wall wash effect. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Decorative bands are .060" extruded aluminum with an apparent thickness of .100" that are screwed to a 22-gauge back plate. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Back plate and bands are finished in satin nickel and oil-rubbed bronze.

Diffuser

Diffuser is .100" thick matte white extruded acrylic lens that installs from the top and slides into position. Allow 18" from top of fixture to any obstruction to clear lens installation.

Electrical

This unit is direct wired with a constant current LED driver rated for 120-277V. Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

Lamping

Fixture includes an LED module producing:
2700K or 3000K (CCT)
15W = 1400 source lumens
23W = 2100 source lumens
Rated for 50,000 hrs., 90 CRI


Certification

All fixtures are cETLus listed for damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

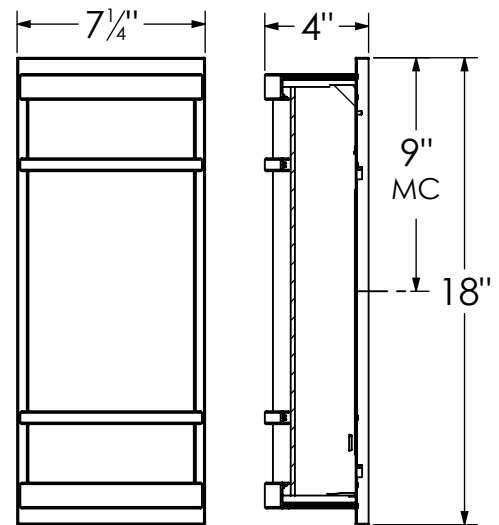

MC - Mounting Center

Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	W	D
BRS7181400L27UDSN	BRS7181400L27UDRB	15W	1400	2700K	18"	7-1/4"	4"
BRS7181400L30UDSN	BRS7181400L30UDRB	15W	1400	3000K	18"	7-1/4"	4"
BRS7182100L27UDSN	BRS7182100L27UDRB	23W	2100	2700K	18"	7-1/4"	4"
BRS7182100L30UDSN	BRS7182100L30UDRB	23W	2100	3000K	18"	7-1/4"	4"