



Tory LED Sconce TYS Series

Features

Transitional design wall mount sconce with classic lines and reminiscence of art deco design. Sconce is ADA compliant and features a hard-back shade with translucent white diffuser on top and bottom. Fixture mounts to standard junction box behind the shade (not included).

Construction

The 22-gauge cold rolled steel metal back pan mounts to standard j-box. Power supply connections must be made inside a junction box (not included). Acrylic Diffuser mounted w/ decorative metal brackets. Shade shipped separate to simplify installation.

Finish

Decorative arm and mounting plate are plated with one of the following finishes:

- Satin Nickel (SN)
- Oakley Bronze (KB)

Diffuser

Linen fabric (WH) or linen acrylic (LA) shade.

Electrical

This unit is direct wired with a constant current LED driver rated for 120-277V. Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

Lamping

Fixture includes LED modules capable of producing:
7W = 700 source lumens
15W = 1400 source lumens
2700K or 3000K (CCT).
50,000 hr. LED life, 90 CRI.

Certification


All fixtures are cETLus listed for damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

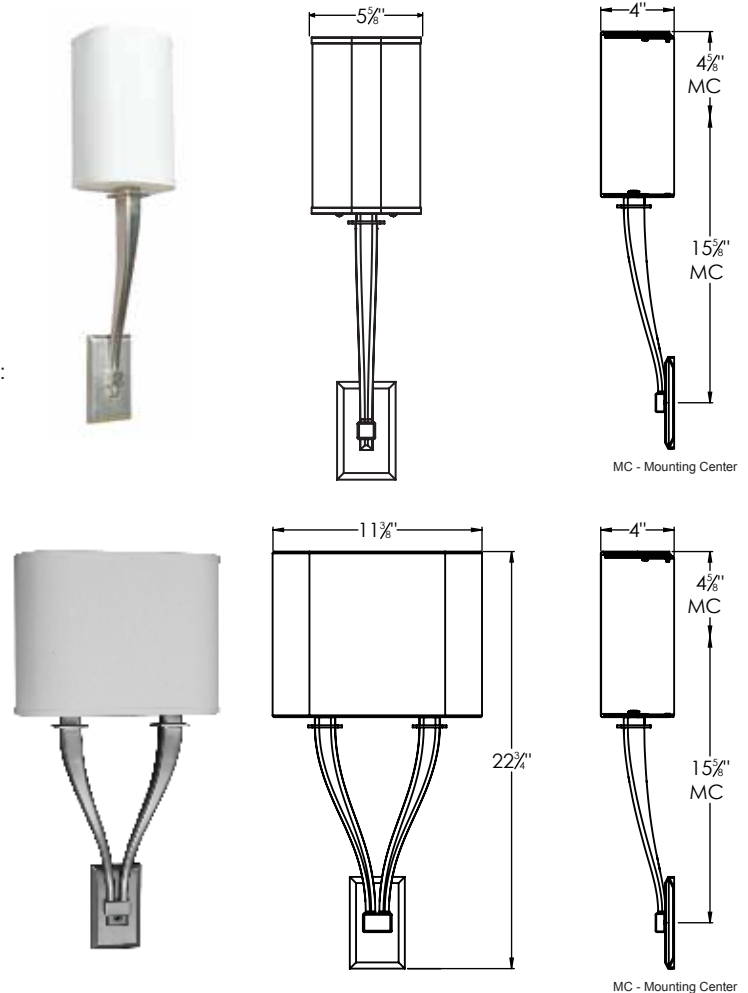

Ordering Information:

Single Arm

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	H	W	D
TYS623700L27UDSNWH	TYS623700L27UDKBWH	7W	700	2700K	22-3/4"	5-5/8"	4"
TYS623700L30UDSNWH	TYS623700L30UDKBWH	7W	700	3000K	22-3/4"	5-5/8"	4"
TYS623700L27UDSNLA	TYS623700L27UDKBLA	7W	700	2700K	22-3/4"	5-5/8"	4"
TYS623700L30UDSNLA	TYS623700L30UDKBLA	7W	700	3000K	22-3/4"	5-5/8"	4"

Double Arm

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	H	W	D
TYS11231400L27UDSNWH	TYS11231400L27UDKBWH	15W	1400	2700K	22-3/4"	11-3/8"	4"
TYS11231400L30UDSNWH	TYS11231400L30UDKBWH	15W	1400	3000K	22-3/4"	11-3/8"	4"
TYS11231400L27UDSNLA	TYS11231400L27UDKBLA	15W	1400	2700K	22-3/4"	11-3/8"	4"
TYS11231400L30UDSNLA	TYS11231400L30UDKBLA	15W	1400	3000K	22-3/4"	11-3/8"	4"